



**Well dimensions are absolute min. plumbed dimensions**

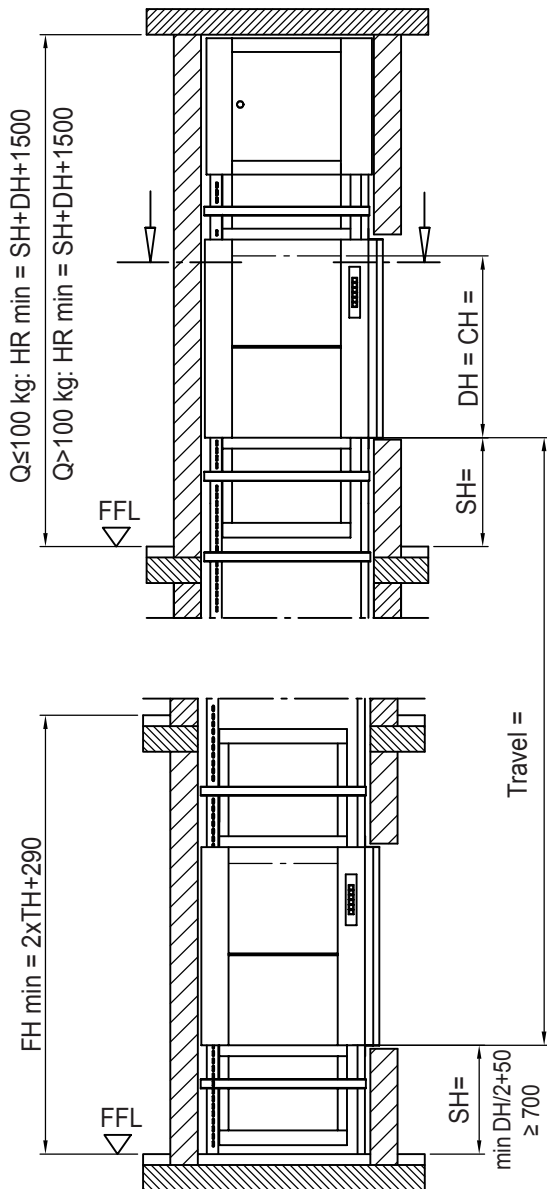


Mirror- inverted installation available

Type 2). Q max. 300 kg

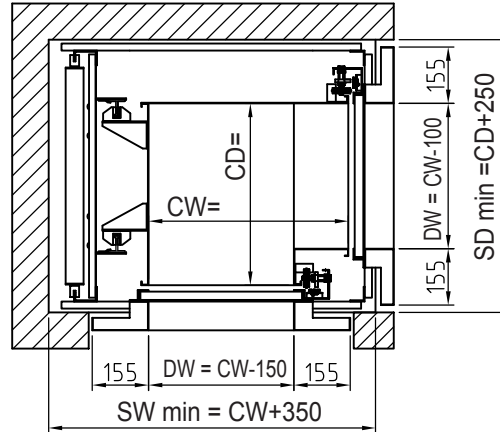

Type 1). Q max. 100 kg

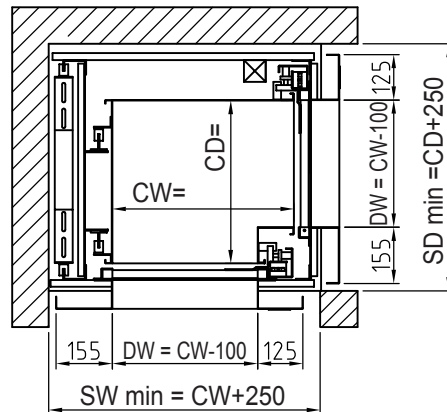

↑  
machine room access

**ATTENTION:**

Cabin protection reduces clear entrance openings resp. shaft sizes (see part 10)

**Accessible rooms underneath shaft inadmissible**

Cabin width and -depth available in increments of 50 mm  
Cabin height available in increments of 100 mm

CW	= cabin width	<b>1). min. 500 - max. 1000 mm</b>	<b>2). min. 700 - max. 1000 mm</b>
CD	= cabin depth	<b>1). min. 500 - max. 1000 mm</b>	<b>2). min. 700 - max. 1000 mm</b>
CH	= cabin height	<b>1). min. 600 - max. 1200 mm</b>	<b>2). min. 600 - max. 1200 mm</b>
DW	= door width	= Cabin width -100 / -150	= Cabin depth -100
DH	= door height	= Cabin height	
SH	= Serving height	= min. 700 mm resp. DH/2+50	
SW	= Shaft width	= plumbed min. dimensions	
SD	= Shaft depth	= plumbed min. dimensions	
HR	= Headroom	= clear height of top floor FFL - underside ceiling	
FFL	= finished floor level		
FH	= Floor to floor height on landing doors in line		



**Prices and specification see back side**